

The World's Most Trusted Industrial Torque and Tension Systems

Thrill™ Impact & Torque

Compliant with the new Noise & Vibration Directive.
Meets all OSHA Requirements for safe tool use.



Impact Pre-Torque

Grab both handles, pull both triggers for a corrosion-overcoming, reaction arm-free, impact assisted pre-torque of up to 1,600 rpm.

The THRILL™ with its impact assisted run off or run down of fasteners overcomes corrosion and thread flaws at high speed. Flipping the stabilizer handle, the THRILL™ turns from an impact gun to a torque power tool, ready to break out fasteners or to torque them up within 5% at continuous rotation rather than the intermittent one of impact guns. This makes the THRILL™ overall the fastest power tool yet!



Safe Precision-Torque

Flip the front handle to abut, push the Safety plate with one hand and pull the trigger with the other to speed up precision-bolting in the safest possible way.



This safety mechanism drastically reduces operator error. The lever must be depressed while pulling the trigger, ensuring operator keeps hands away from pinch points.



24 Hour SERVICE

888-GUN-2-GUN

www.torquegun.com


— THE —
TORQUE GUN™
— COMPANY —

120 WESLEY ST., SO. HACKENSACK NJ 07606

ACCESSORIES



Calibration of your tools just got more convenient! Verify the torque output of your tools, on the job site, instantly with the NEW FIELDCHECK!

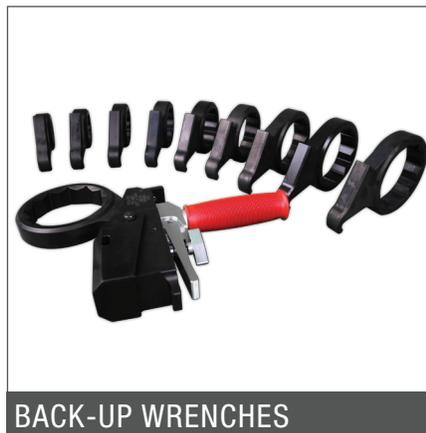


A backup wrench with an instant release even under load and a handle out of harm's way has finally become reality. The back up tool kit comes with click-in 12-point cassettes in sizes from 1-7/16 – 3-1/8" AF.



Impact and torque assert different stress loads to sockets. The TorCimpact™ sockets from the TORQUE GUN Company come in all sizes and configurations. The difference is Quality and instant availability.

DIMENSIONAL DATA

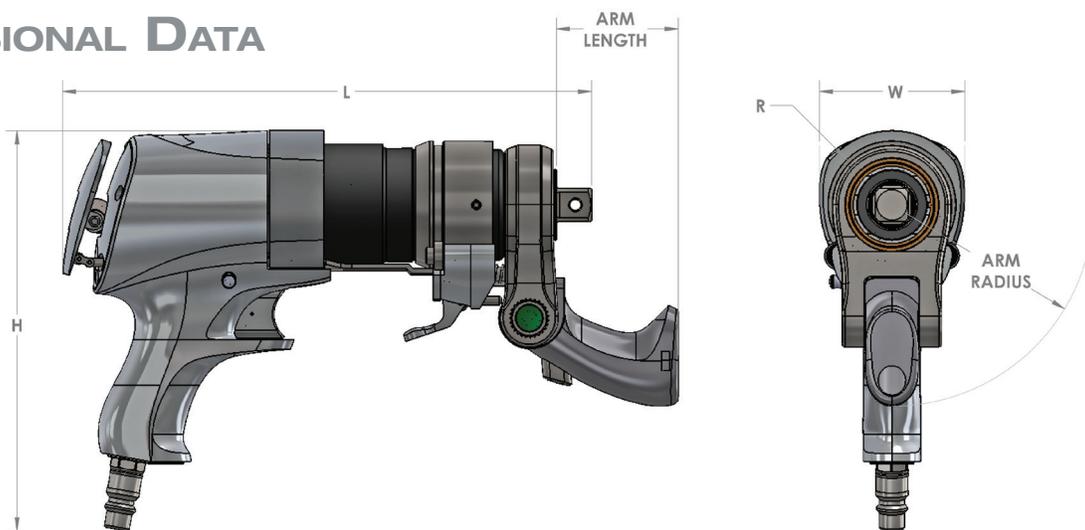

MODEL	THRILL-A.25	THRILL-A.5	THRILL-A.7	THRILL-A1	THRILL-A3
TORQUE RANGE	63-283 ft. lbs. (383.7 Nm)	117-528 ft. lbs. (715.9 Nm)	180-808 ft. lbs. (1095.5 Nm)	252-1134 ft. lbs. (1537.5 Nm)	685-3083 ft. lbs. (4178.6 Nm)
DRIVE SIZE	1/2" SQ.	3/4" SQ.	3/4" SQ.	3/4" SQ.	1" SQ.
HEIGHT (H)	8.25" (21.0 cm)	8.25" (21.0 cm)	9.05" (22.0 cm)	9.05" (22.0 cm)	9.52" (24.2 cm)
LENGTH (L)	10.83" (27.5 cm)	11.25" (28.6 cm)	11.54" (29.3 cm)	11.79" (29.9 cm)	15.64" (39.7 cm)
WIDTH (W)	2.71" (6.9 cm)	2.71" (6.9 cm)	3.29" (8.4 cm)	3.29" (8.4 cm)	3.50" (8.9 cm)
RADIUS	1.12" (2.8 cm)	1.12" (2.8 cm)	1.59" (4.0 cm)	1.59" (4.0 cm)	1.75" (4.4 cm)
ARM LENGTH	2.75" (7.0 cm)	2.75" (7.0 cm)	2.75" (7.0 cm)	2.75" (7.0 cm)	3.50" (8.9 cm)
ARM RADIUS	4.19" (10.6 cm)	4.19" (10.6 cm)	4.55" (11.4 cm)	4.55" (11.4 cm)	6.18" (15.7 cm)
WEIGHT	9.18 lbs. (4.16 kg)	10.19 lbs. (4.62 kg)	13.30 lbs. (6.03 kg)	15.53 lbs. (7.04 kg)	28.70 lbs. (13.02 kg)
RUNDOWN RPM (NO LOAD)	4393 RPM	4182 RPM	4200 RPM	4000 RPM	2500 RPM
FINAL TORQUE RPM	25 RPM	12 RPM	12 RPM	7 RPM	4 RPM